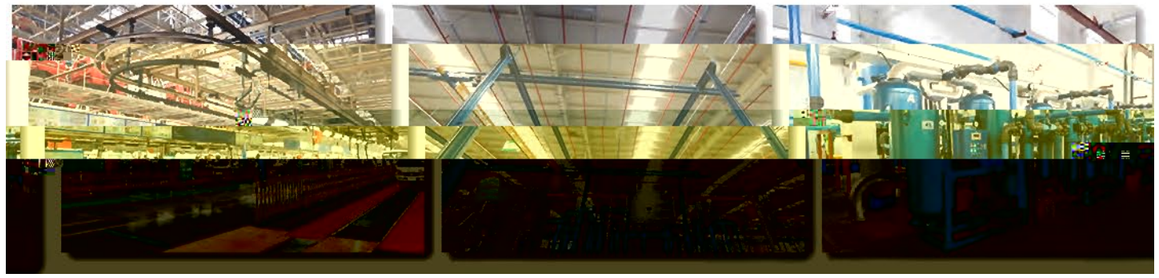

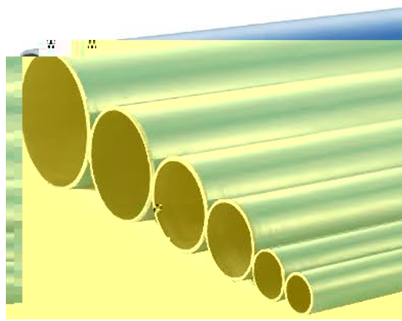

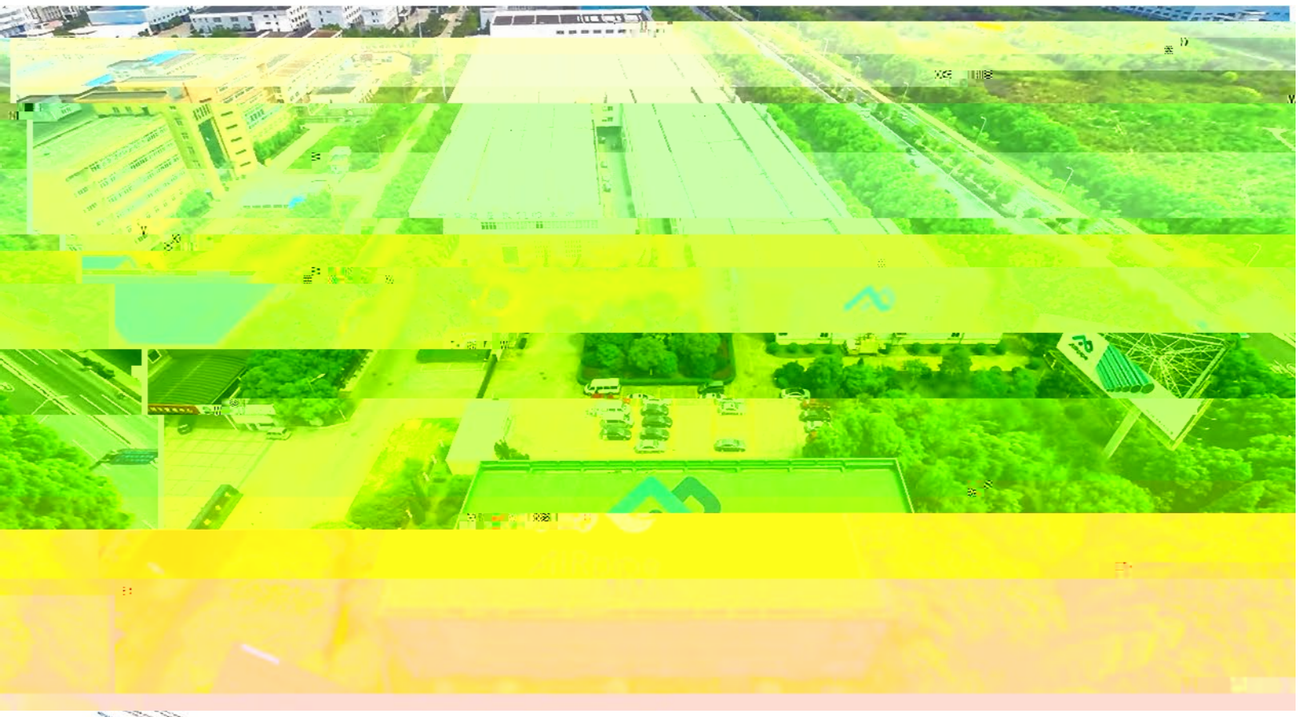

Superior Reliability & Longevity
最佳可靠性和使用年限

- D
- M
- P
-
-
-

Quick & Easy Modular Installation
便捷的模组化安装

Energy & Cost Savings
成本高效益 最低使用成本

- T
- C
-
-

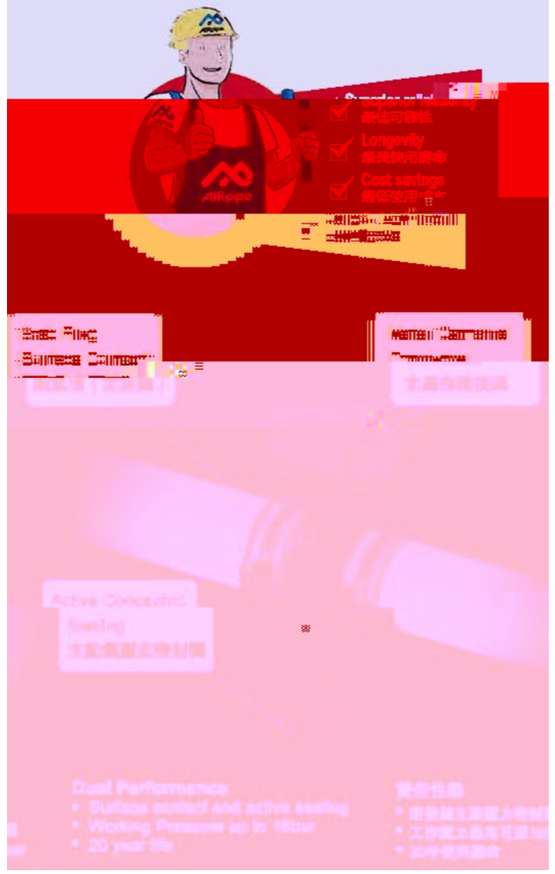

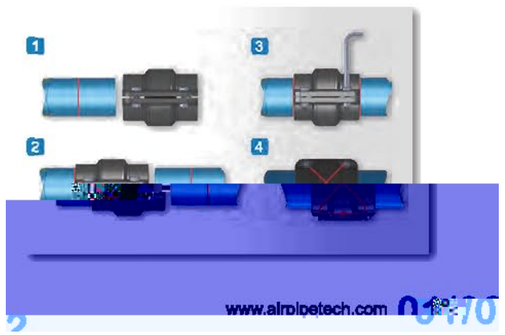

Engineered for Superior Performance

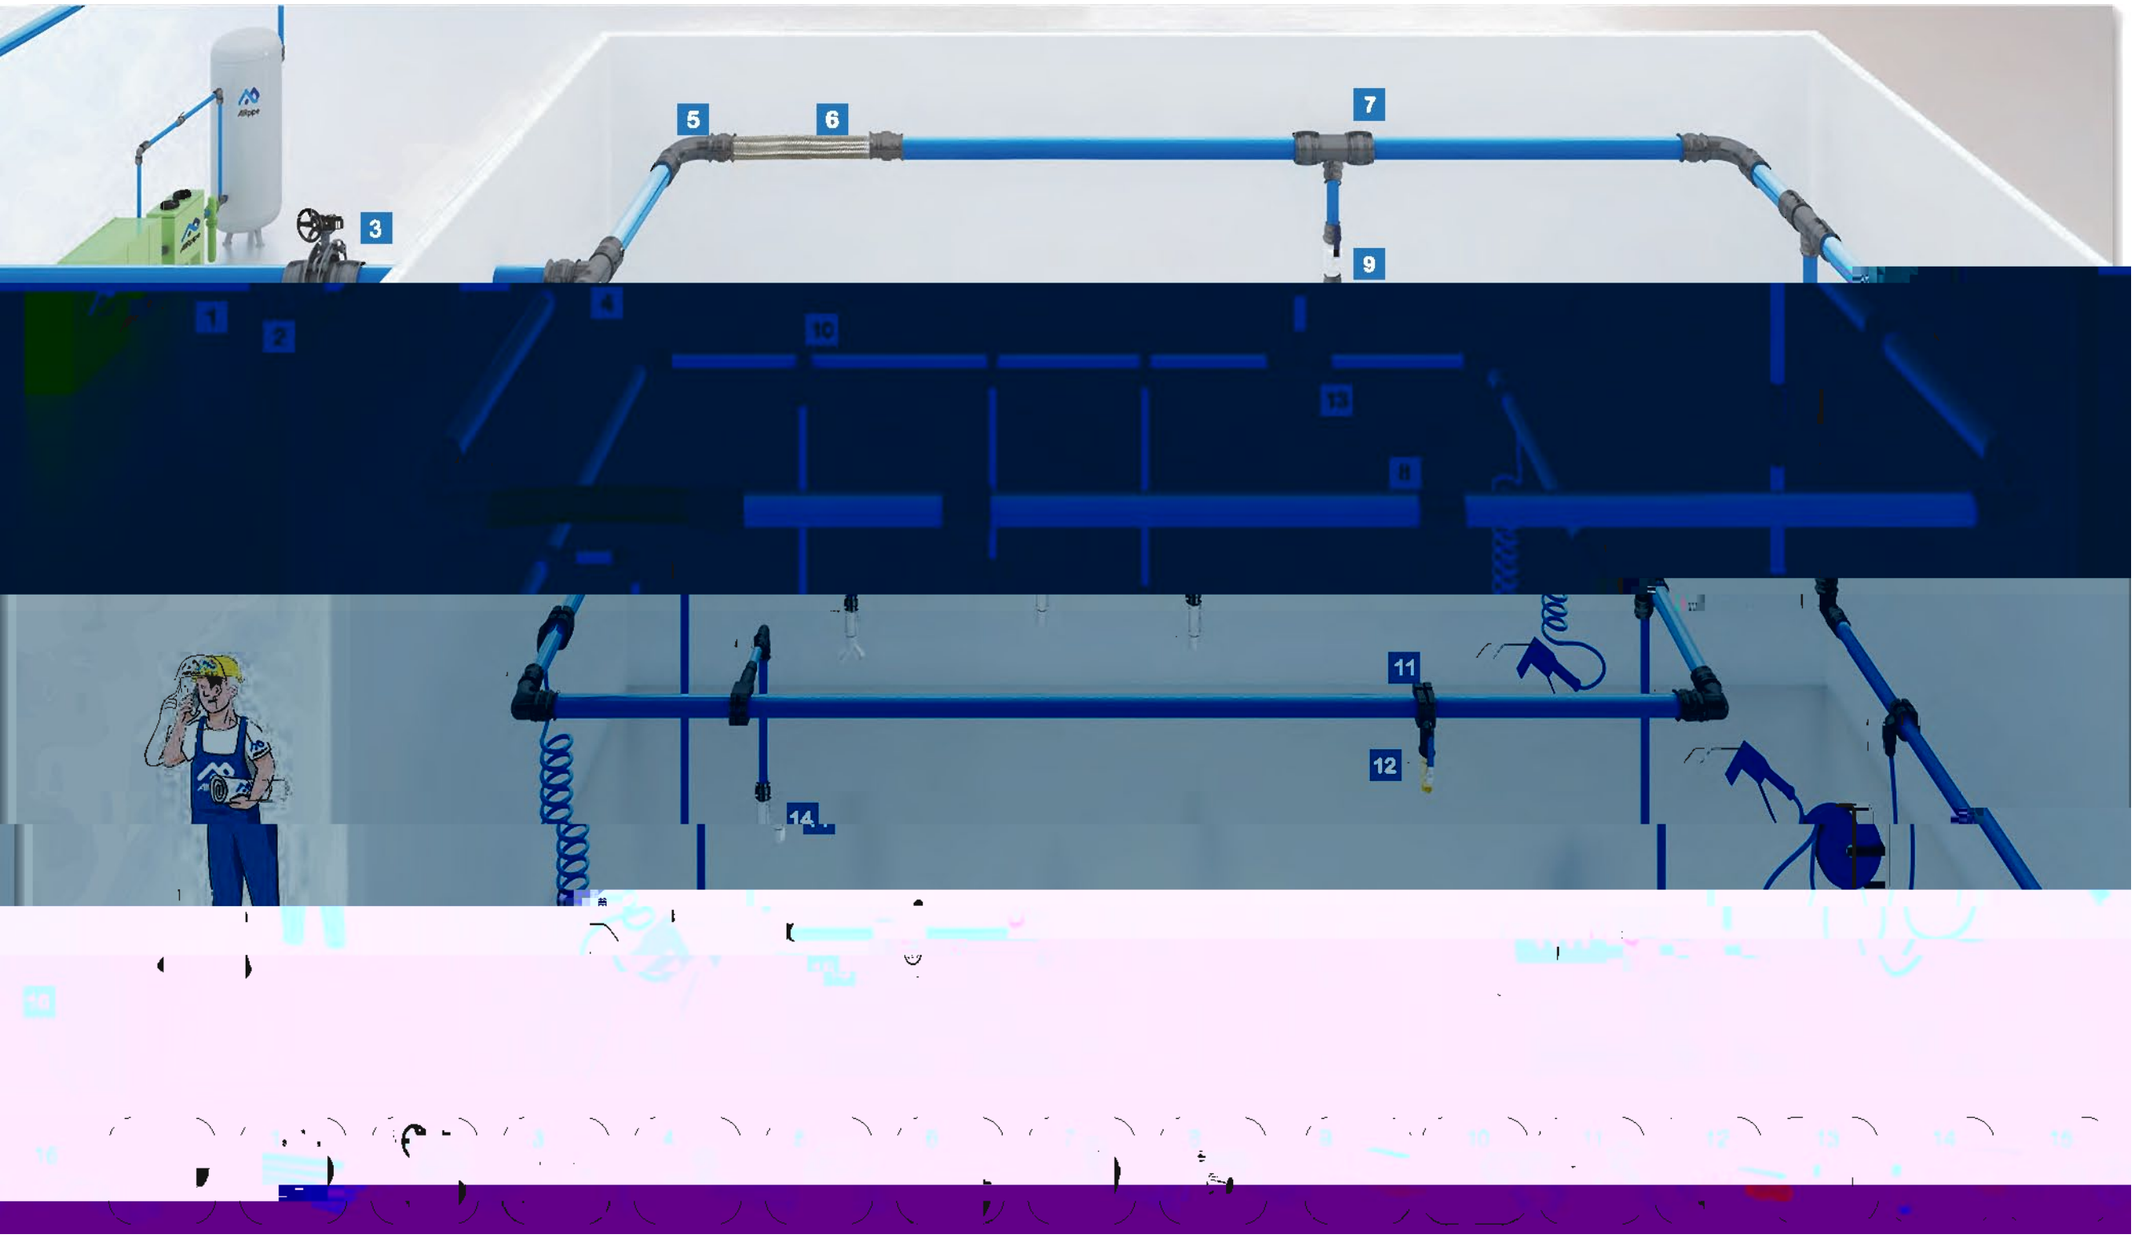

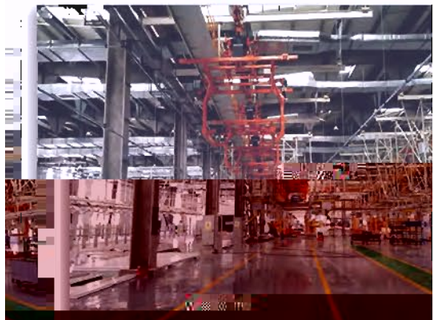

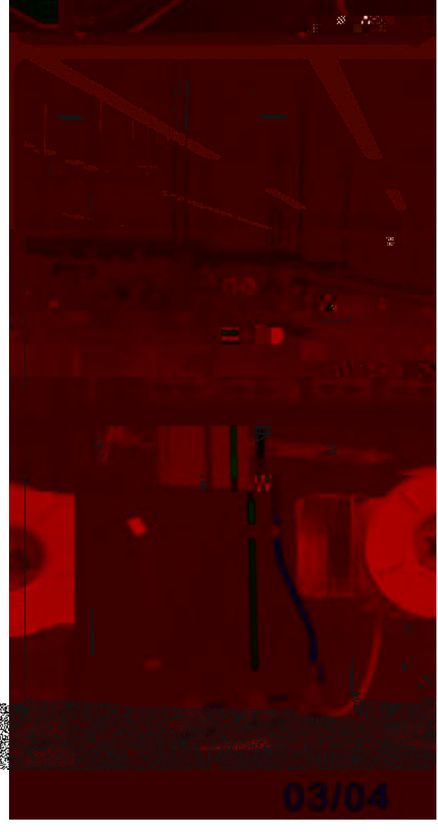

1	Aluminum Pipe	剛性鋁合金管	5	Aluminum 90 Degree Elbow	90度彎頭	5 Quick Plug Ball Valve	快速連接球閥	5 Quick Plug Equal Tee	快插組合等徑三通
2	Flanged Connector	法蘭片	6	Flexible Hose	彈性耐壓管	6 Aluminum Quick Drop	支管快接頭	6 Thread Quick Plug Ball Valve	快插組合螺紋球閥
3	Quick Connect	快速連接球閥	7	[illegible]	[illegible]	7 Quick Drop	支管快接頭	7 [illegible]	[illegible]
4	[illegible]								

Product Range & Features
產品範圍和特性

Rigid Aluminum Pipe 剛性鋁合金管

Pipe Connectors 快速管接頭

Flexible Hoses 彈性耐壓管

Quick Drop Fittings 快速支管接頭

Tools & Accessories 附件和工具

BLUE ALUMINUM PIPE 藍色鋁管

GRAY ALUMINUM PIPE 灰色鋁管

EQUAL PIPE TO PIPE CONNECTORS 管對管接頭

GREEN ALUMINUM PIPE 綠色鋁管

END CAP 堵頭

EQUAL TEE 等徑三通

EQUAL 90° ELBOW 90° 彎頭

REDUCING TEE 異徑三通

REDUCING PIPE TO PIPE CONNECTOR 異徑管對管

LATERAL EQUAL TEE Y型等徑三通

EQUAL 45° ELBOW 45° 彎頭



ALUMINUM JOINT FEMALE THREAD 內螺紋鋁製接頭

LATERAL REDUCING TEE Y型異徑三通

Engineered for Superior Performance

FIXTURE CLAMPS & ACCESSORIES
管夾

THREADED ADAPTORS
轉接頭

ATMOLYSIS BAG
分氣包

SAMPLE BOX
演示包

TOOL BOX
工具箱

DRILL (TAPPER)
鑽頭

DRILL HOLDER
鑽頭夾具

CLAMP SPACER
管夾墊

VORTEX FLOW METER
渦街流量計

PRESSURE METER
氣體壓力錶

MARKER
記號筆

HOLE DEBURRER
去毛刺機

ALUMINUM PIPE DEBURRER
鋁管去毛刺器

ADJUSTABLE BRACKET
可伸縮支架

WALL MOUNTED BRACKET
壁管支架

SPANNERS
水泵鉗

GRIDER CLAMP
老虎鉗

UNIVERSAL BEAM SUSPENDER
外向抱箍吊扣

ALUMINUM PIPE CUTTER
鋁管切割器

SQUARE STEEL CLAMP
壓板

PIPE BENDING TOOL
彎管器

ELECTRIC PIPE CUTTER
電動鋁管切割機

FIXING BOLTS
螺栓

SQUARE STEEL
方鋼

FIXTURE CLAMPS & ACCESSORIES
萬向抱箍

WIRE SUSPENSION CABLE
鋼絲繩

PIPE BENDING MACHINE
管機

Engineered for Superior Performance

Superior Reliability!

最佳可靠性

Insertion Depth S For DN20-DN50 Connector
DN20-DN50 (¾" - 2") 管路安装插入深度S

DN	Insertion depth S (mm) 插入深度S (mm)
50	39

Deburr & Chamfer The Outer and Inner Edges Before Installation
安装前去除管材切口内外毛刺

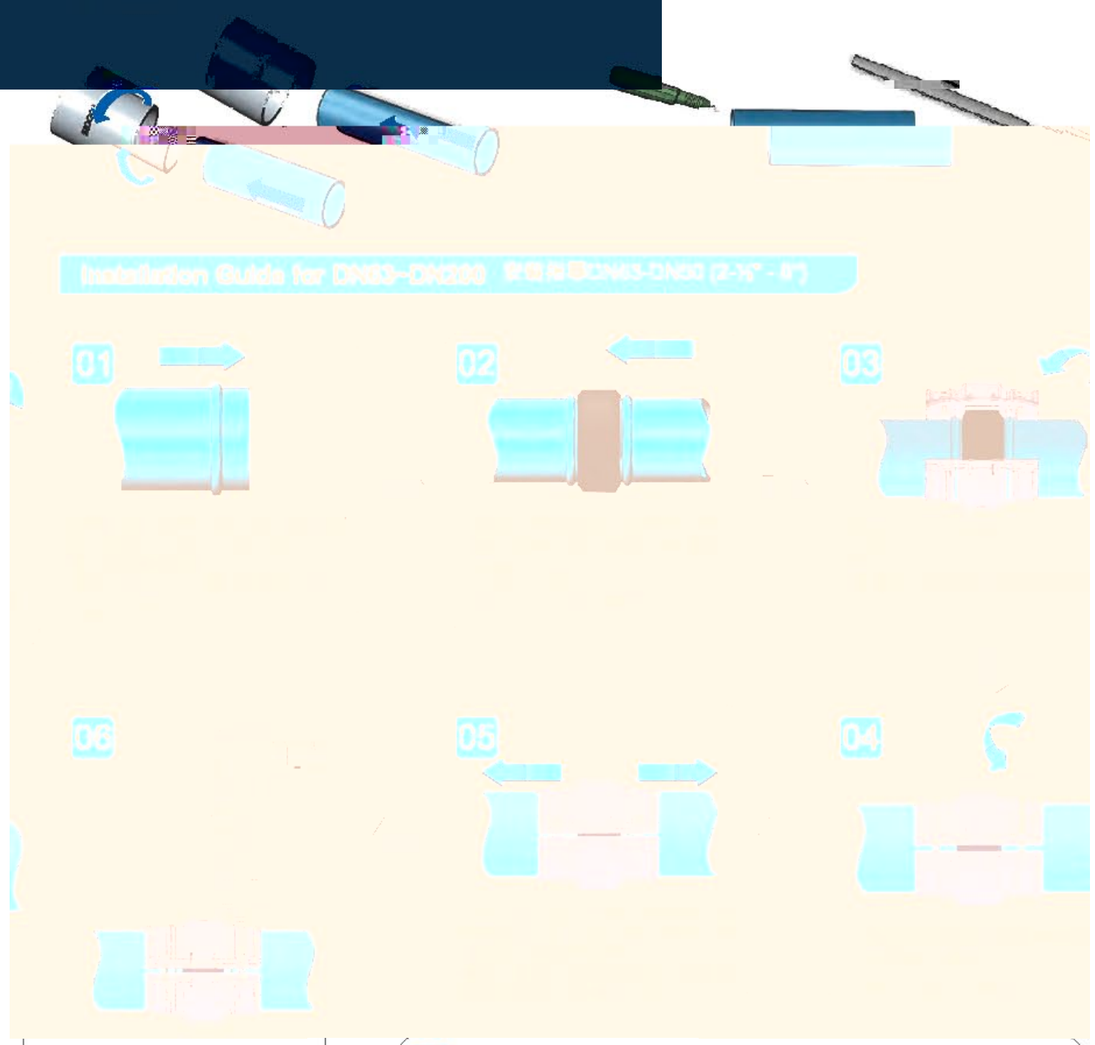

Installation Guide for DN20~DN50 安装指导DN20-DN50 (¾" - 2")

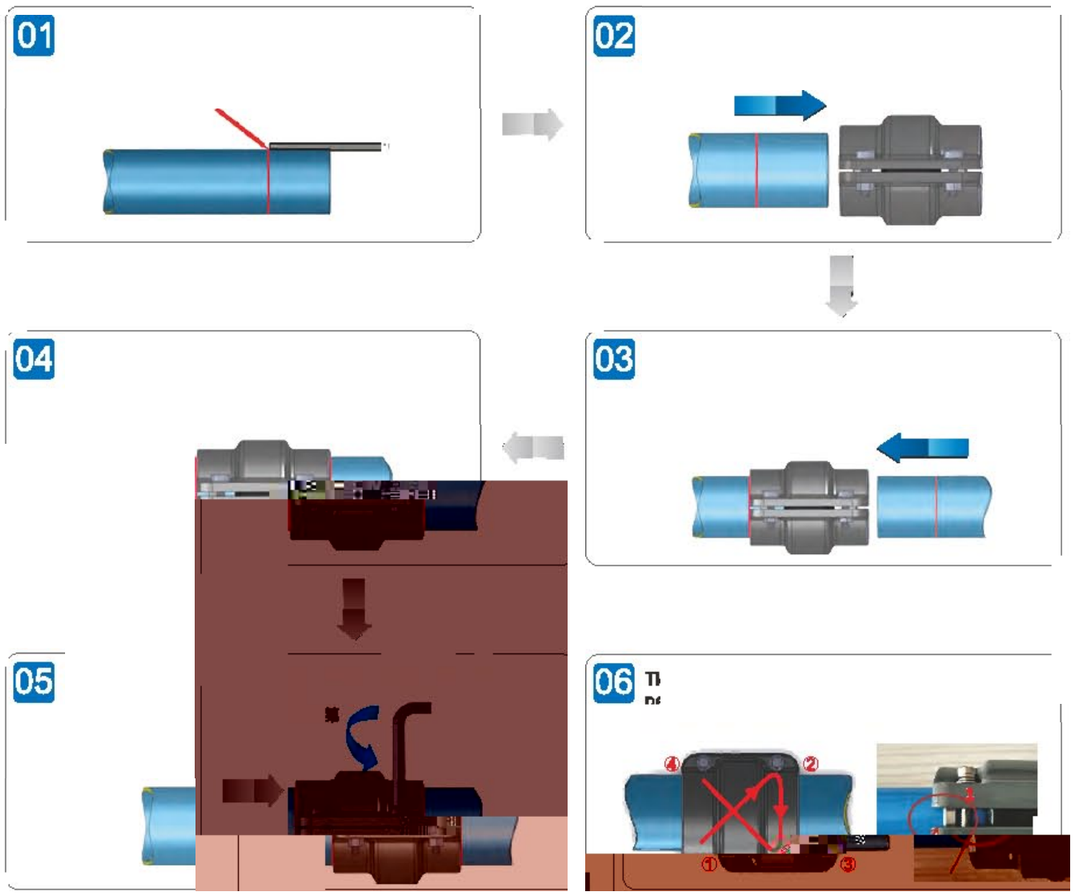

Hand-held hydraulic lugging machine operation requirements 手持液壓凸管器作業要求

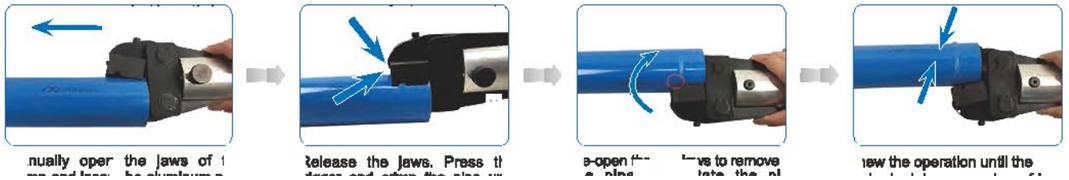

nually oper the jaws of t
Release the jaws. Press th
e-open th ves to remove
iew the operation until the

Number of lugs for each diameter: 各規格凸管數

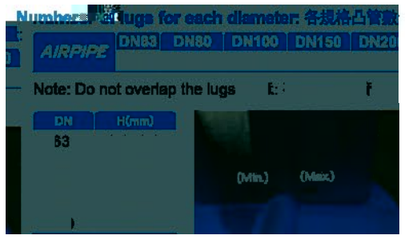

Sizing Chart for Quick Drops 快換尺寸表

DN(MM)	Quick Drops (PN) 快換 (PN)
	301 35 0005 01 301 35 0006 05 Φ61 302 10 1004 01 302 10 1005 01 302 10 1104 01 302 10 1105 01

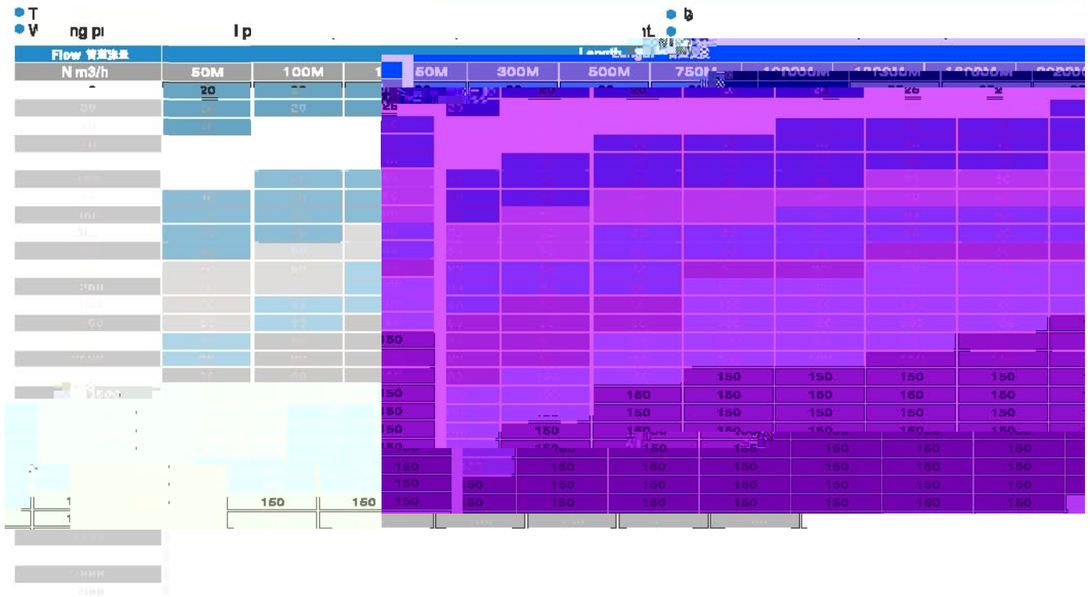

Technical Specifications 工況範圍

Qualification & Standards 符合規範和標準

ASME



Engineered for Superior Performance 產品設計，只為最佳效能
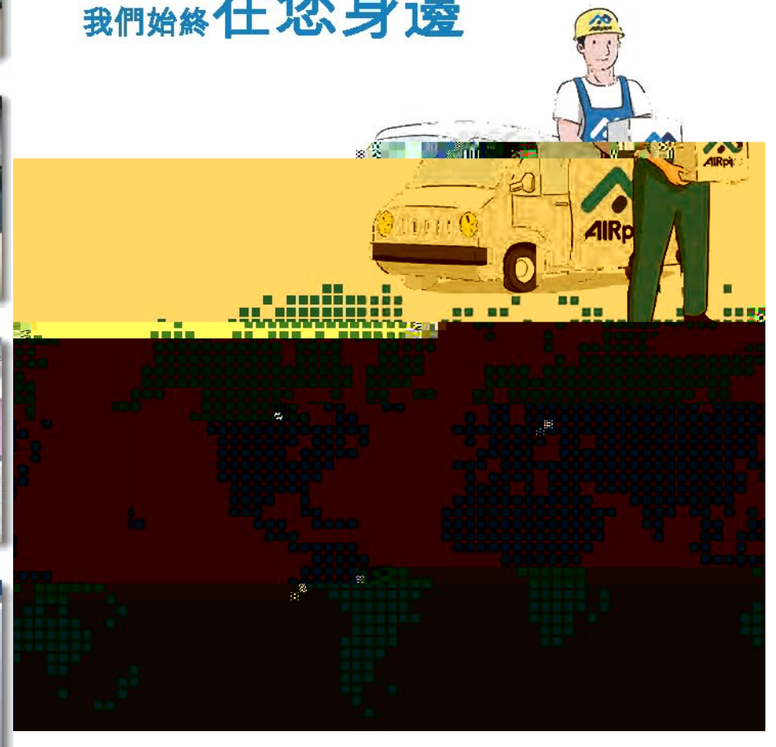
we are at your SERVICE
我們始終在您身邊